


GEHL

# SKID LOADERS

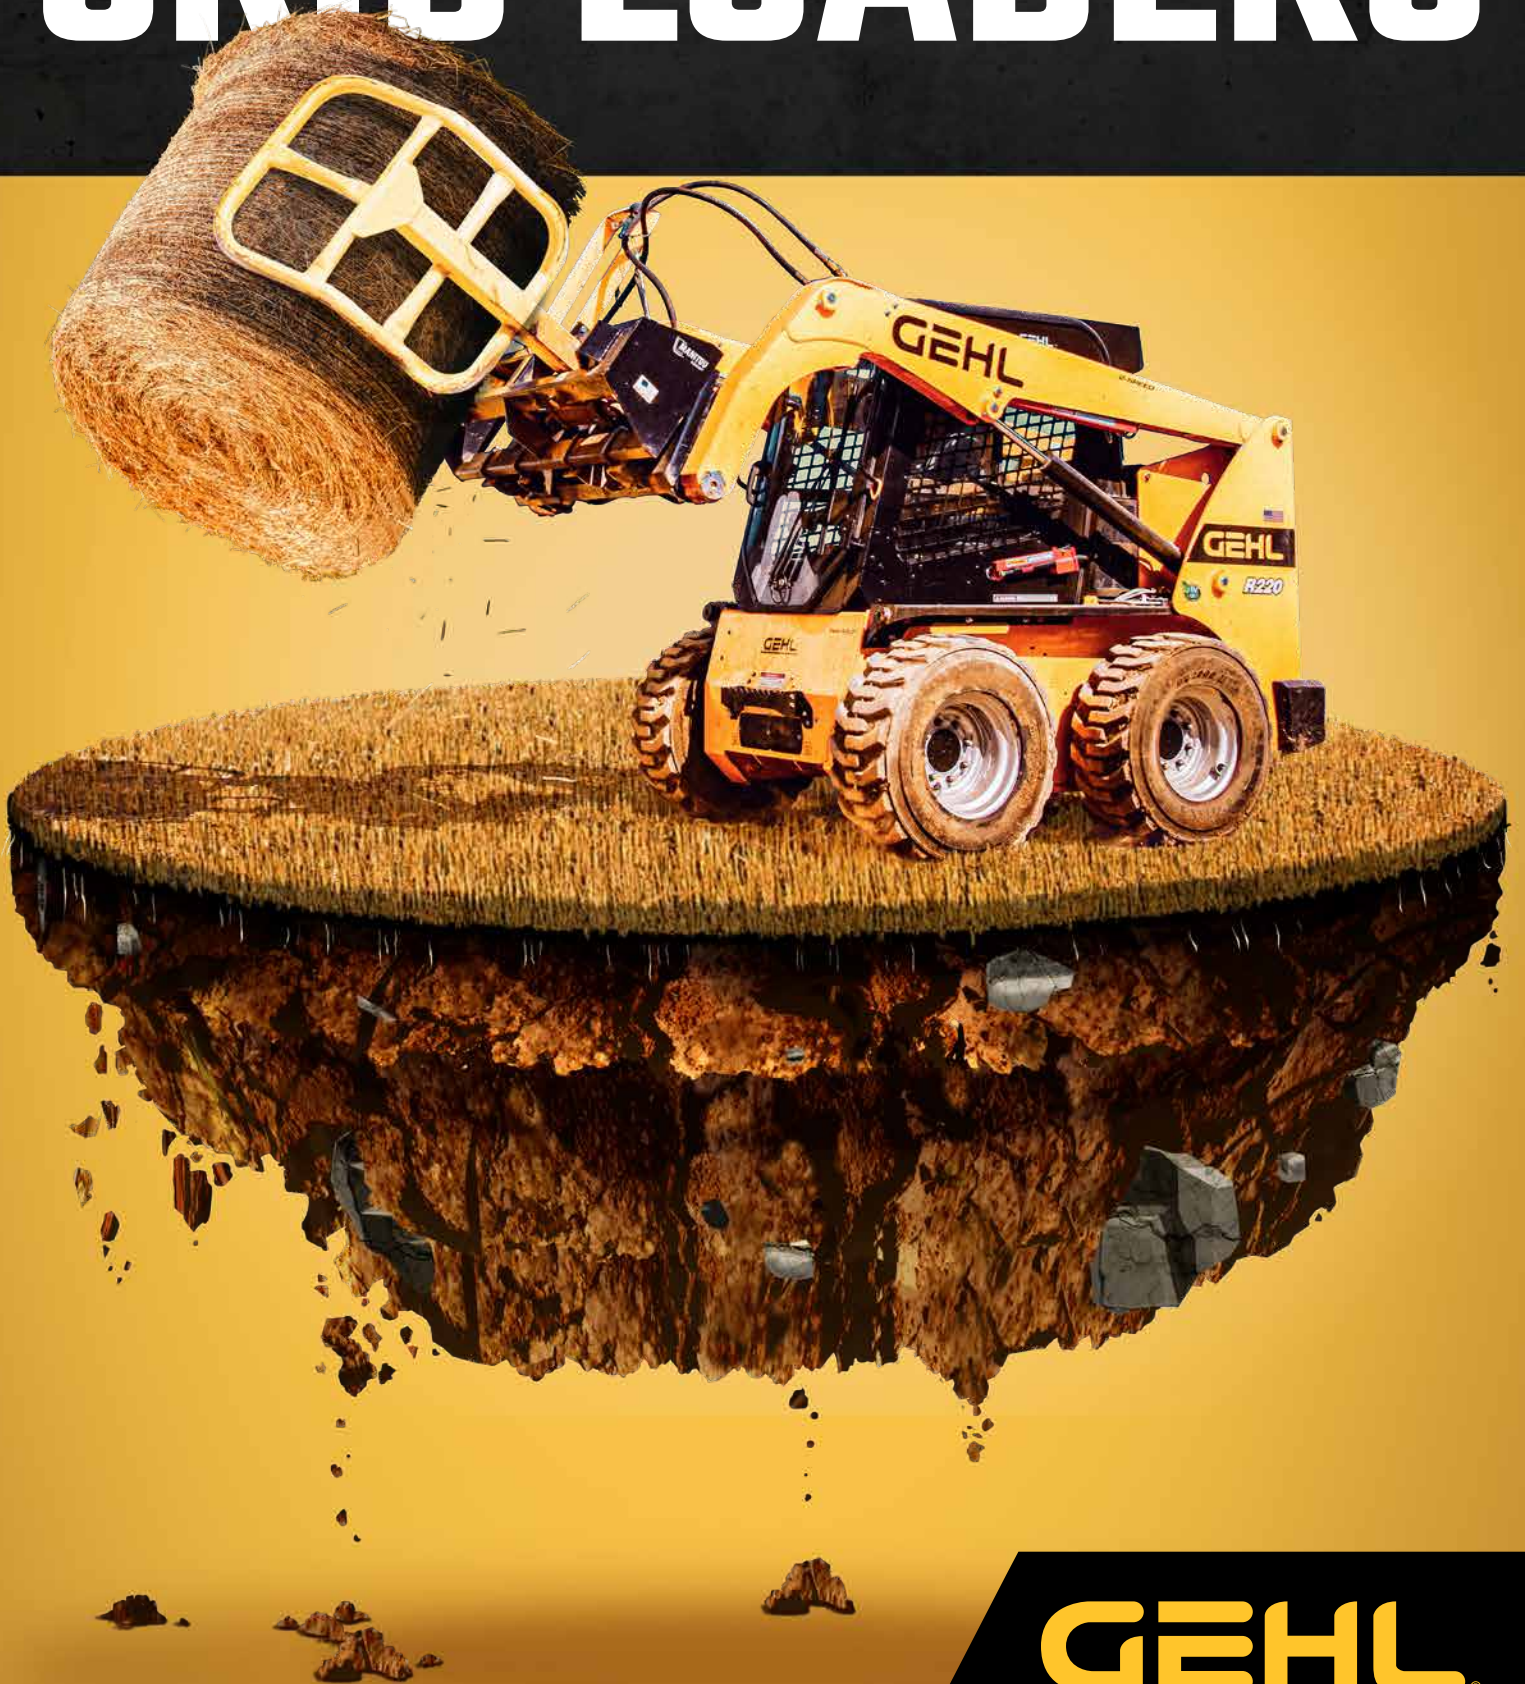

GEHL®

WORKS LIKE YOU™





**BORN ON AN  
AMERICAN FARM  
IN 1859.**

---

**GEHL**<sup>®</sup>  
**WORKS LIKE YOU**<sup>™</sup>

**S**tarting in 1859 GEHL has been rooted in agriculture. Designing and building machines to help America's hardest workers. Many years later, we are offering products world-wide that work just as hard as the people who own and operate them.

We build machines that make life easier and exceed expectations. Here at GEHL we know that true satisfaction isn't felt while earth-moving but looking back at a job well-done. That is the true payoff for our operators and built in our DNA at GEHL.

For over 160 years we have been partnering with farmers, construction crews, landscapers and rental companies – large and small – to help move mountains and build a strong foundation of trust. **We care about our operators.** Safety and efficiency go into every machine we produce to help hardworking people get home safe and maybe even a little bit early. ■

**The true payoff comes in a job well-done.**

---



**RAISED ON  
A GLOBAL  
JOB SITE.**

# GEHL

**W**e have always designed and built machines to help the needs of the people who change our landscape. Over time, regulations and the needs of these workers change. GEHL continues to innovate and change with them to supply the most robust durable machines on the market.

Humble and hard working people, responsible for molding and changing the world around us are not overlooked by our brand. With that in mind, GEHL has contributed heavily to the construction industry and is dedicated to continue for many years to come.

GEHL has invested significantly into the future of our products and will continue to change and meet the requirements of urban job sites. Driven by the voice of our customers and industry data we are committed to be here to design, build, service and stand behind our products. We will help you do the heavy lifting.

As the global landscape changes we stay on track supplying machines that are reliable and meet or exceed emissions standards for the future of our planet and our young operators of tomorrow. ■



# SKID LOADERS



## R105

Height to Hinge Pin-Fully Raised  
- 108" | 2743mm  
Rated Operating Capacity  
- 1,050lbs | 476kg  
Lift Path Geometry - Radial

### CUSTOMER BENEFITS

Ultra Compact  
H - 5'11" / W - 4'1" / L - 7'5"  
Perfect Rental Machine  
Easy to Transport



## R135

Height to Hinge Pin-Fully Raised  
- 110" | 2794mm  
Rated Operating Capacity  
- 1,350lbs | 612kg  
Lift Path Geometry - Radial

### CUSTOMER BENEFITS

Ultra Compact  
H - 6'4" / W - 4'6" / L - 7'8"  
Pilot Joystick Controls  
Great for Rental  
Easy to Transport



## R165

Height to Hinge Pin-Fully Raised  
- 118.5" | 3018mm  
Rated Operating Capacity  
- 1,650lbs | 748kg  
Lift Path Geometry - Radial

### CUSTOMER BENEFITS

Compact  
H - 6'5" / W - 5'2" / L - 7'10"  
Optional Pilot Joystick Controls  
Wicked Speed  
Operator Favorite



## R190

Height to Hinge Pin-Fully Raised  
- 121" | 3073mm  
Rated Operating Capacity  
- 1,900lbs | 862kg  
Lift Path Geometry - Radial

### CUSTOMER BENEFITS

Mid-Size Loader  
H - 6'8" / W - 5'5" / L - 7'10"  
Pilot Joystick Controls  
Expanded Lift Height



## R220

Height to Hinge Pin-Fully Raised  
- 123" | 3124mm  
Rated Operating Capacity  
- 2,200lbs | 998kg  
Lift Path Geometry - Radial

### CUSTOMER BENEFITS

Mid-Size Loader  
H - 6'9" / W - 5'7.4" / L - 8'9"  
Great for Construction  
Manufacturer's Favorite



## R260

Height to Hinge Pin-Fully Raised  
- 123" | 3124mm  
Rated Operating Capacity  
- 2,600lbs | 1179kg  
Lift Path Geometry - Radial

### CUSTOMER BENEFITS

Large Loader  
H - 6'9" / W - 5'7.4" / L - 9'4"  
Largest Radial Skid Loader  
Heavy Duty Counter Weights



## V270

Height to Hinge Pin-Fully Raised  
- 130.3" | 3310mm  
Rated Operating Capacity  
- 2,700lbs | 1225kg  
Lift Path Geometry - Vertical

### VERTICAL LIFT

Large Loader  
H - 6'9" / W - 5'8" / L - 9'9"  
Expanded Operator Visibility  
Higher Dumping Ability



## V330

Height to Hinge Pin-Fully Raised  
- 131" | 3327mm  
Rated Operating Capacity  
- 3,300lbs | 1497kg  
Lift Path Geometry - Vertical

### VERTICAL LIFT

Large Loader  
H - 6'10" / W - 6' / L - 9'11"  
Largest Skid Loader Capacity  
Highest Dumping Height



# KEEPING YOU ROLLIN'

## VISIBILITY

Excellent sightlines from all sides for safe and precise placement of loads and reduced jobsite incidents. A high-mounted seat provides an excellent vantage point to the attachment and cutting-edge.

## LEVEL II ROPS/FOPS - BEST IN CLASS

Provides the highest level of safety protection for an operator in a roll over or falling object situation.

## CLIMATE CONTROL

Upgrade to Pressurized Cab Enclosure with air conditioning and heat to utilize the most of your machine. No matter the weather, you'll be running comfortably. Optional air ride seat and Bluetooth radio are two additions that help any operator with long hours of operation.

## SAFETY

Our heavy duty doors offer operator protection, easy entry/exit and are well sealed for maximum operator climate controlled comfort. Add AC/Heat and you'll feel the difference and never go back.

## TRUE HYDRAULIC POWER

Hydraulic hoses and cylinders designed and built to be well-protected from wear and hidden away from sight to help prolong life and keep your investment running strong.

## ATTACHMENTS

A full line of attachments and accessories are designed specifically to fill operators' needs, making their GEHL the most versatile machine on the job site. Some popular attachments that transform your machines in minutes are: Augers, Backhoes, Bale Clamps/Spears, Brooms, Mowers, High Dump Buckets, Grapples, and Pallet Forks, to name a few. Upgrade to hydraulic Power-A-Tach® to change and secure new attachments without leaving the comfort of your cab.

## SERVICE

Easy access to the chain case makes maintenance and repairs much faster getting you back on the job site or in the fields with minimal down time to your machine.

## HIGH GROUND CLEARANCE

These are off road machines and our in-house design team has done an excellent job of offering the highest possible ground clearance to keep you rolling on flatwork or when earthmoving.

## GEHL MODEL NUMBERS

Easy to understand; add a "0" after any model number to give you the rated operating capacity in pounds. Example: R220 = Radial skid loader with 2,200 lbs. rated operating capacity.

## MAINTENANCE

Excellent service access and quality components pair up to provide durable machines that are easy to maintain.





# LET'S GET INSIDE

## WE UNDERSTAND THE CAB IS YOUR OFFICE.

We offer many standard and optional features to improve operator comfort and know the importance of being comfortable while working. Not only for operator fatigue but also for overall job site safety. A comfortable and alert operator is a safe operator. Please consider these well-thought-out features and the benefits your crew will have when building your next loader.

### PRESSURIZED CAB

An optional pressurized, sealed cab enclosure provides a cleaner, quieter operating environment.

### INTERIOR LIGHTS

We know our operators start at dawn and work past dusk, so we have interior lights and optional additional work lights to fit your needs.

### EXCELLENT VIEWS FROM ALL SIDES

Safe, clear visibility for precise operation. Rear window is removable for alternative exit in emergencies.

### POWER PORT

12-volt accessory plug keeps your devices fully charged.



### 2" (51 MM) SEATBELT

Optional 3" (76 mm) seatbelt available.

### CONTROL OPTIONS

Hand/Foot, T-Bar, Dual-hand or Joystick available on selected models.



DUAL-HAND



T-BAR



HAND/FOOT



JOYSTICK

### ADJUSTABLE CONTROL TOWERS

Towers extend and retract to provide personalized comfort.

### STORAGE COMPARTMENTS

Designed for your phone, keys and other items you need within arms reach.

### BEST IN CLASS - STANDARD ROPS II OVERHEAD PROTECTION

### MULTIPLE AIR VENTS

Six adjustable vents throughout the cab provide optimal temperature control.

### HEAVY-DUTY SIDE PROTECTION

Sliding windows open for venting and communicating while still protected by single piece metal grate.

### EASY ENTRY AND EXIT

Large entry area allows for easy access to the operator station.

### BLUETOOTH MP3 RADIO

Optional upgrade to wirelessly play music, podcasts or take phone calls using the speakers in the cab.

### ADJUSTABLE SEAT

Choose between an air-ride suspension or mechanical suspension seat.

### PADDED, ADJUSTABLE ARMRESTS

### OPERATOR SAFETY

The machine safety system (Hydralac™) allows operation only when the user is on the seat and the restraint bar is lowered into position.

### CUP HOLDER

### CLIMATE CONTROL

Heat is standard on all cab models. Air conditioning is an option on select models.

### SPACIOUS COMFORT

Keeping you comfortable after a long day and some models have easy removable foot plate for easy cleaning of the cabin floor.







## VISIBILITY + SAFETY

Operator safety is at the core of every product we build. Every skid and track loader cab features industry leading **Level II Falling Object Protective Structure (FOPS)** and **Roll-Over Protective Structure (ROPS)**. This sets GEHL machines apart from the sea of compact loaders. Remember that you'll be lifting tons, literally tons of material and this operator

protection will ensure you're home safe at the dinner table once you leave the job site or farm. To safely operate, visibility is also a key factor. Our machines feature excellent visibility and additional options (rear view cameras, alarms and rear-view mirrors) to raise productivity and minimize accidents that are possible during heavy equipment operation.

## SKID OR TRACK?

Choosing between a skid loader and a track loader can be a difficult decision. It is most important to get behind the controls of each machine and make the decision that best fits your needs. Typically a wheeled skid loader is better suited for environments where you're working on flat solid ground; inside sheds, on pavement/concrete, cleaning out barns, etc.

A track loader has less ground pressure per square inch making it perfect for working over crop fields or landscaping. There's a reason why army tanks have tracks and true to our machines they can maneuver over almost any wet, muddy or harsh ground conditions without disrupting the earth's surface as much as a traditional wheeled machine.



### DIGITAL COLOR DISPLAY


This information center (on selected models) shows real-time fuel consumption, engine RPM's, machine hours, engine diagnostic codes, warning indicators and much more.

### REAR VIEW CAMERA

This optional feature improves visibility and increases the safety of those around you while operating.

# KEEP YOUR PROJECT ROLLING

Skid loaders are usually the first of the machines to show up at a new build. The perfect machine for earthmoving, land prep and concrete flatwork. Get behind the controls of a GEHL skid loader at your local dealer and you'll feel the difference.



Scan with your phone to find your local dealer.

[www.gehl.com/en-US/store-locator](http://www.gehl.com/en-US/store-locator)






# R105




## CONTROL TYPES

**STANDARD**



T-BAR



HAND/FOOT

**1,050 lbs.**  
RATED LIFTING CAPACITY

**5'11"**  
OVERALL HEIGHT  
[4'1" WIDE WITHOUT BUCKET]

When you're ready to take your business or property to the next level this R105 ultra-compact skid loader shines. Easy for a customer or rental company to transport. Clearing narrow gates and small entry ways is no problem for this all-terrain machine. Offering improved performance on rough and uneven ground. Take advantage of the full versatility of the R105 skid steer loader to carry out your various operations, transporting, loading, grading and unloading. Make sure to check out this durable loader at a low price point in its capacity class. You can also transform your machine anytime with a variety of skid loader attachments offered by GEHL.



	Imperial	Metric
<b>Capacities</b>		
Rated Operating Capacity	1050 lbs	476 kg
Rated Operating Capacity with Optional Counterweight	1175 lbs	533 kg
Unladen weight	4200 lbs	1905 kg
<b>Weight and dimensions</b>		
Overall Operating Height - Fully Raised	142 in	3607 mm
Height to Hinge Pin - Fully Raised	108 in	2731 mm
Overall Height to Top of ROPS	70 in	1784 mm
Dump angle at full height	40 °	40 °
Dump height	82 in	2083 mm
Overall length with bucket	118 in	2997 mm
Dump reach - Full height	25 in	641 mm
Rollback at ground	31 °	31 °
Seat to ground height	33 in	826 mm
Wheelbase	34 in	876 mm
Overall width less bucket	49 in	1232 mm
Bucket Width	54 in	1372 mm
Ground clearance	6 in	159 mm
Overall length - Less Bucket	89 in	2248 mm
Clearance Radius - Front with Bucket	72 in	1829 mm
Clearance Circle - Front without Bucket	42 in	1067 mm
Clearance Circle - Rear	54 in	1372 mm
<b>Performances</b>		
Travel speed (unladen)	5 mph	8.26 km/h
<b>Wheels</b>		
Standard tires	27x8.5x15 HD	27x8.5x15 HD
<b>Engine</b>		
Engine brand	Yanmar	Yanmar
Engine model	3TNV88C-KMS Final Tier IV	3TNV88C-KMS Final Tier IV
Gross Power	34.19 HP	25.50 kW
Net Power	31.78 HP	23.70 kW
Max. torque / Engine rotation	80.68 ft-lbs / 1820 rpm	109.40 Nm / 1820 rpm
Battery	12 V	12 V
Starter	3 HP	2.30 kW
<b>Hydraulics</b>		
Standard flow - Auxiliary hydraulics	14.52 G/min	55 l/min
<b>Tank capacities</b>		
Fuel tank	11 US gal	43.18 l
Reservoir Capacity Hydraulics	8 US gal	30.30 l
Displacement	0.43 US gal	1.64 l
<b>Noise and vibration</b>		
Environmental noise (LwA)	101 dB	101 dB
Whole-Body Vibration (ISO 2631-1)	1.12 m/s <sup>2</sup>	1.12 m/s <sup>2</sup>
Vibration to whole hand/arm	< 1.70 m/s <sup>2</sup>	< 1.70 m/s <sup>2</sup>





Capacities	Imperial	Metric
Rated Operating Capacity	1350 lbs	612 kg
Rated Operating Capacity with Optional Counterweight	1499 lbs	680 kg
Unladen weight	5255 lbs	2383.62 kg
Weight and dimensions		
Overall Operating Height - Fully Raised	144 in	3670.30 mm
Height to Hinge Pin - Fully Raised	110 in	2790 mm
Overall Height to Top of ROPS	76 in	1930 mm
Dump angle at full height	40 °	40 °
Dump height	83 in	2120 mm
Overall length with bucket	121 in	3073.40 mm
Dump reach - Full height	23 in	591 mm
Rollback at ground	28 °	28 °
Seat to ground height	34 in	871.22 mm
Wheelbase	37 in	950 mm
Overall width less bucket	54 in	1364 mm
Bucket Width	54 in	1372 mm
Ground clearance	8 in	201 mm
Overall length - Less Bucket	93 in	2359.66 mm
Clearance Radius - Front with Bucket	73 in	1842 mm
Clearance Circle - Front without Bucket	44 in	1120 mm
Clearance Circle - Rear	54 in	1372 mm
Performances		
Travel speed (unladen)	8 mph	12.90 km/h
Wheels		
Standard tires	10.00x16.5 HD	10.00x16.5 HD
Engine		
Engine brand	Yanmar	Yanmar
Engine model	4TNV88C	4TNV88C
Engine norm	Stage V / Tier 4	Stage V / Tier 4
Gross Power	46 HP	34.30 kW
Net Power	44.52 HP	33.20 kW
Max. torque / Engine rotation	107.83 ft-lbs / 1820 rpm	146.20 Nm / 1820 rpm
Battery	12 V	12 V
Starter	3 HP	2.30 kW
Hydraulics		
Standard flow - Auxiliary hydraulics	16.8 G/min	63.60 l/min
Tank capacities		
Fuel tank	16 US gal	59.40 l
Displacement	0.58 US gal	2.19 l
Noise and vibration		
Environmental noise (LWA)	101 dB	101 dB
Whole-Body Vibration (ISO 2631-1)	0.81 m/s <sup>2</sup>	0.81 m/s <sup>2</sup>
Vibration to whole hand/arm	< 1.77 m/s <sup>2</sup>	< 1.77 m/s <sup>2</sup>



The R135 GEN:2 skid loader is a great option that includes a compact body style with a little extra lifting capacity compared to our smallest loaders. Still able to be easily transported and the operator experience is very intuitive. New low effort controls in the GEN:2 help with operator fatigue after a long day behind the controls. Air-ride seat and other upgradeable options are available to increase comfort if long hours of operation are more common than not for your new R135 GEN:2.

### CONTROL TYPES

OPTIONAL



T-BAR



HAND/FOOT



JOYSTICK

**1,350 lbs.**  
RATED LIFTING CAPACITY


**9'2"**  
HEIGHT TO HINGE PIN  
[FULLY RAISED]

**8 MPH**  
GROUND SPEED  
[SINGLE SPEED]





# R165



BUCKET WIDTH 5'2"

## CONTROL TYPES

OPTIONAL



T-BAR



HAND/FOOT



JOYSTICK

When it's time to get a high-performance and versatile solution for your agricultural / construction operations choose the R165. A true crowd favorite. Compact body style with true raw power. This latest generation machine with perfect all-terrain maneuverability is ideal for your most demanding applications in confined spaces and on uneven ground. Combining driving comfort, precision of movement, multifunction use (thanks to endless attachments available).

**1,650 lbs.**  
RATED LIFTING CAPACITY

**6.29"**  
GROUND CLEARANCE

Capacities	Imperial	Metric
Rated Operating Capacity	1650 lbs	748 kg
Rated Operating Capacity with Optional Counterweight	1800 lbs	816.50 kg
Unladen weight	6164 lbs	2796 kg
Weight and dimensions		
Overall Operating Height - Fully Raised	153 in	3876 mm
Height to Hinge Pin - Fully Raised	118 in	3009.90 mm
Overall Height to Top of ROPS	77 in	1955.80 mm
Dump angle at full height	38 °	38 °
Dump height	94 in	2379 mm
Overall length with bucket	122 in	3101 mm
Dump reach - Full height	23 in	579 mm
Rollback at ground	28 °	28 °
Seat to ground height	36 in	904 mm
Wheelbase	39 in	986 mm
Overall width less bucket	62 in	1580 mm
Bucket Width	61 in	1562 mm
Ground clearance	6 in	160 mm
Overall length - Less Bucket	94 in	2385 mm
Departure angle	21 °	21 °
Clearance Radius - Front with Bucket	74 in	1869 mm
Clearance Circle - Front without Bucket	45 in	1153 mm
Clearance Circle - Rear	58 in	1466 mm
Performances		
Travel Speed with Two-Speed Option - Maximum	12 mph	19.50 km/h
Travel speed (unladen)	8 mph	12.60 km/h
Wheels		
Standard tires	10.00x16.5 HD	10.00x16.5 HD
Engine		
Engine brand	Yanmar	Yanmar
Engine model	4TNV98C-NMS2V	4TNV98C-NMS2V
Gross Power	69.33 HP	51.70 kW
Net Power	68.39 HP	51 kW
Max. torque / Engine rotation	177.75 ft-lbs / 1625 rpm	241 Nm / 1625 rpm
Battery	12 V	12 V
Starter	4 HP	3 kW
Hydraulics		
Standard flow - Auxiliary hydraulics	20.34 G/min	77 l/min
High-Flow Auxiliary Hydraulics - Option	30.11 G/min	114 l/min
Tank capacities		
Fuel tank	17 US gal	62.50 l
Reservoir Capacity Hydraulics	10 US gal	39 l
Displacement	0.87 US gal	3.30 l
Noise and vibration		
Environmental noise (LWA)	101 dB	101 dB
Whole-Body Vibration (ISO 2631-1)	1.05 m/s <sup>2</sup>	1.05 m/s <sup>2</sup>
Vibration to whole hand/arm	< 1.53 m/s <sup>2</sup>	< 1.53 m/s <sup>2</sup>





# R190


Capacities	Imperial	Metric
Rated Operating Capacity	1900 lbs	862 kg
Rated Operating Capacity with Optional Counterweight	2110 lbs	957 kg
Unladen weight	6881 lbs	3121 kg
Weight and dimensions		
Overall Operating Height - Fully Raised	158 in	4013 mm
Height to Hinge Pin - Fully Raised	121 in	3061 mm
Overall Height to Top of ROPS	80 in	2032 mm
Dump angle at full height	42 °	42 °
Dump height	91 in	2311 mm
Overall length with bucket	127 in	3226 mm
Dump reach - Full height	23 in	572 mm
Rollback at ground	26 °	26 °
Seat to ground height	39 in	991 mm
Wheelbase	42 in	1067 mm
Overall width less bucket	64 in	1631 mm
Bucket Width	66 in	1676 mm
Ground clearance	6 in	165 mm
Overall length - Less Bucket	94 in	2388 mm
Clearance Radius - Front with Bucket	79 in	2007 mm
Clearance Circle - Front without Bucket	44 in	1130 mm
Clearance Circle - Rear	59 in	1486 mm
Performances		
Travel Speed with Two-Speed Option - Maximum	12 mph	20.10 km/h
Travel speed (unladen)	8 mph	12.10 km/h
Wheels		
Standard tires	10.00x16.5 HD	10.00x16.5 HD
Engine		
Engine brand	Yanmar	Yanmar
Engine model	4TNV98C-NMS Tier IV	4TNV98C-NMS Tier IV
Gross Power	69.33 HP	51.70 kW
Net Power	68.39 HP	51 kW
Max. torque / Engine rotation	177.75 ft.-lbs / 1625 rpm	241 Nm / 1625 rpm
Battery	12 V	12 V
Starter	4 HP	3 kW
Hydraulics		
Standard flow - Auxiliary hydraulics	18.5 G/min	70 l/min
High-Flow Auxiliary Hydraulics - Option	31.43 G/min	119 l/min
Tank capacities		
Fuel tank	17 US gal	62.50 l
Reservoir Capacity Hydraulics	8 US gal	30.30 l
Displacement	0.87 US gal	3.30 l
Noise and vibration		
Environmental noise (LWA)	101 dB	101 dB
Whole-Body Vibration (ISO 2631-1)	0.96 m/s <sup>2</sup>	0.96 m/s <sup>2</sup>
Vibration to whole hand/arm	< 1.50 m/s <sup>2</sup>	< 1.50 m/s <sup>2</sup>




Boasting 1,900 lbs. of rated operating capacity this machine is not to be underestimated. With the optional counterweight added this machine can lift over a ton! Remember to consider how you'll be transporting the machine you choose because a smaller body style may play to your advantage. Visit a dealer today to get behind the controls and find the right fit for you. On a farm or job site daily tasks change and this machine is suitable to be your multi-functional tool that fits every job perfectly.

## CONTROL TYPES

OPTIONAL



DUAL-HAND



JOYSTICK

**1,900 lbs.**  
RATED LIFTING CAPACITY

**10'1"**  
HEIGHT TO HINGE PIN  
[FULLY RAISED]






# R220




## CONTROL TYPES

**OPTIONAL**



**DUAL-HAND**



**JOYSTICK**

Optimize your operations with the R220. This medium-frame skid loader was born at the intersection of dimension and performance. The ideal construction machine that will handle most jobs with ease. We thought naming this machine “Simple, Intuitive and Strong”, but it didn’t pass the approval of our marketing department. The R220, need we say more? If so, visit your local dealer and they’ll show you inside and outside of this beast. Simple to service and works like you.

**2,200 lbs.**  
RATED LIFTING CAPACITY

**8”**  
GROUND CLEARANCE



Capacities	Imperial	Metric
Rated Operating Capacity	2200 lbs	998 kg
Rated Operating Capacity with Optional Counterweight	2370 lbs	1075 kg
Unladen weight	7981 lbs	3620 kg
Weight and dimensions		
Overall Operating Height - Fully Raised	161 in	4089 mm
Height to Hinge Pin - Fully Raised	123 in	3124 mm
Overall Height to Top of ROPS	81 in	2057 mm
Dump angle at full height	40 °	40 °
Dump height	94 in	2388 mm
Overall length with bucket	136 in	3467 mm
Dump reach - Full height	27 in	685.80 mm
Rollback at ground	28 °	28 °
Seat to ground height	40 in	1016 mm
Wheelbase	43 in	1092 mm
Overall width less bucket	67 in	1711.96 mm
Bucket Width	67 in	1711.96 mm
Ground clearance	8 in	203 mm
Overall length - Less Bucket	105 in	2667 mm
Clearance Radius - Front with Bucket	88 in	2223 mm
Clearance Circle - Front without Bucket	52 in	1321 mm
Clearance Circle - Rear	60 in	1524 mm
Performances		
Travel Speed with Two-Speed Option - Maximum	12 mph	19.20 km/h
Travel speed (unladen)	8 mph	12.90 km/h
Wheels		
Standard tires	12.00x16.5 HD	12.00x16.5 HD
Engine		
Engine brand	Yanmar	Yanmar
Engine model	4TNV98CT-NMS Tier IV	4TNV98CT-NMS Tier IV
Gross Power	72 HP	53.70 kW
Net Power	70.67 HP	52.70 kW
Max. torque / Engine rotation	216.84 ft-lbs / 1625 rpm	294 Nm / 1625 rpm
Battery	12 V	12 V
Starter	4 HP	3 kW
Hydraulics		
Standard flow - Auxiliary hydraulics	23.78 G/min	90 l/min
High-Flow Auxiliary Hydraulics - Option	35 G/min	132.50 l/min
Tank capacities		
Fuel tank	18 US gal	68.10 l
Reservoir Capacity Hydraulics	8 US gal	30.30 l
Displacement	0.87 US gal	3.30 l
Noise and vibration		
Environmental noise (LwA)	101 dB	101 dB
Whole-Body Vibration (ISO 2631-1)	0.96 m/s <sup>2</sup>	0.96 m/s <sup>2</sup>
Vibration to whole hand/arm	< 1.50 m/s <sup>2</sup>	< 1.50 m/s <sup>2</sup>





# R260


Capacities	Imperial	Metric
Rated Operating Capacity	2600 lbs	1179 kg
Rated Operating Capacity with Optional Counterweight	2780 lbs	1261 kg
Unladen weight	8199 lbs	3719 kg
Weight and dimensions		
Overall Operating Height - Fully Raised	161 in	4089 mm
Height to Hinge Pin - Fully Raised	123 in	3124 mm
Overall Height to Top of ROPS	81 in	2057 mm
Dump angle at full height	40 °	40 °
Dump height	94 in	2388 mm
Overall length with bucket	143 in	3632 mm
Dump reach - Full height	27 in	686 mm
Rollback at ground	28 °	28 °
Seat to ground height	40 in	1016 mm
Wheelbase	49 in	1257 mm
Overall width less bucket	67 in	1712 mm
Bucket Width	67 in	1711.96 mm
Ground clearance	8 in	203 mm
Overall length - Less Bucket	111 in	2832 mm
Clearance Radius - Front with Bucket	90 in	2286 mm
Clearance Circle - Front without Bucket	56 in	1422 mm
Clearance Circle - Rear	64 in	1626 mm
Performances		
Travel Speed with Two-Speed Option - Maximum	12 mph	19.20 km/h
Travel speed (unladen)	8 mph	12.90 km/h
Wheels		
Standard tires	12.00x16.5 HD	12.00x16.5 HD
Engine		
Engine brand	Yanmar	Yanmar
Engine model	4TNV98CT-NMS Tier IV	4TNV98CT-NMS Tier IV
Gross Power	72 HP	53.70 kW
Net Power	70.67 HP	52.70 kW
Max. torque / Engine rotation	216.84 ft-lbs / 1625 rpm	294 Nm / 1625 rpm
Battery	12 V	12 V
Starter	4 HP	3 kW
Hydraulics		
Standard flow - Auxiliary hydraulics	23.78 G/min	90 l/min
High-Flow Auxiliary Hydraulics - Option	35 G/min	132.50 l/min
Tank capacities		
Fuel tank	22 US gal	81.40 l
Reservoir Capacity Hydraulics	8 US gal	30.30 l
Displacement	0.87 US gal	3.30 l
Noise and vibration		
Environmental noise (LwA)	101 dB	101 dB
Whole-Body Vibration (ISO 2631-1)	0.96 m/s <sup>2</sup>	0.96 m/s <sup>2</sup>
Vibration to whole hand/arm	< 1.50 m/s <sup>2</sup>	< 1.50 m/s <sup>2</sup>




The R260 is largest radial lift skid loader in GEHL's offering, and it doesn't disappoint. With 2,600 lbs. of rated operating capacity, it's hard to find an application tougher than this machine. Various control options give owners the ability to select what is most comfortable to them, making them even more productive throughout a long day.

## CONTROL TYPES

OPTIONAL



DUAL-HAND



JOYSTICK

**2,600 lbs.**  
RATED LIFTING CAPACITY

**10'3"**  
HEIGHT TO HINGE PIN  
[FULLY RAISED]

**5'10"**  
BUCKET WIDTH  
[STANDARD]



**VERTICAL  
LIFT**



**V270**



**CONTROL TYPES**

OPTIONAL



**DUAL-HAND**




**JOYSTICK**

Our smallest vertical lift skid loader, the GEHL V270, offers higher dumping heights, expanded visibility, intuitive controls, precise movement and an ergonomic operator station. Take advantage of all its performance to facilitate your daily handling operations. Earth-moving to feed-moving this machine is built to assist you in whatever you (or your buddy) has on their project list. DIY to LLC. this machine will not let you down.

**2,700 lbs.**  
RATED LIFTING CAPACITY

**10'10.3"**  
HEIGHT TO HINGE PIN  
[FULLY RAISED]

**8,151 lbs.**  
UNLADEN WEIGHT

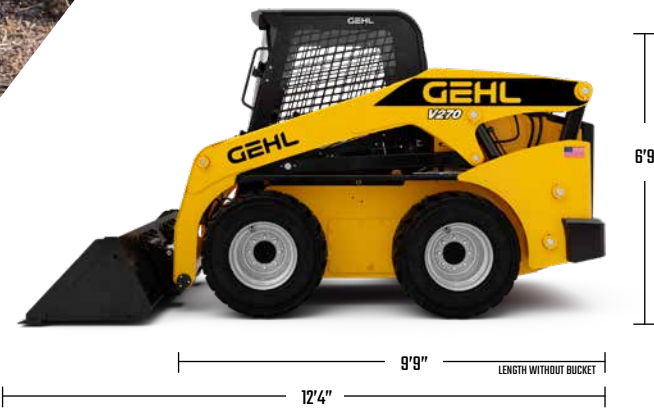

Capacities	Imperial	Metric
Rated Operating Capacity	2700 lbs	1225 kg
Rated Operating Capacity with Optional Counterweight	3000 lbs	1361 kg
Unladen weight	8150 lbs	3697 kg
Weight and dimensions		
Overall Operating Height - Fully Raised	167 in	4252 mm
Height to Hinge Pin - Fully Raised	130 in	3309.62 mm
Overall Height to Top of ROPS	81 in	2057.40 mm
Dump angle at full height	42 °	42 °
Dump height	100 in	2540 mm
Overall length with bucket	148 in	3759 mm
Dump reach - Full height	32 in	813 mm
Rollback at ground	29 °	29 °
Seat to ground height	40 in	1016 mm
Wheelbase	49 in	1257 mm
Overall width less bucket	67 in	1712 mm
Bucket Width	70 in	1778 mm
Ground clearance	8 in	203 mm
Overall length - Less Bucket	116 in	2959 mm
Clearance Radius - Front with Bucket	90 in	2286 mm
Clearance Circle - Front without Bucket	56 in	1422 mm
Clearance Circle - Rear	66 in	1689 mm
Performances		
Travel Speed with Two-Speed Option - Maximum	12 mph	19.20 km/h
Travel speed (unladen)	8 mph	12.87 km/h
Wheels		
Standard tires	12.00x16.5 HD	12.00x16.5 HD
Engine		
Engine brand	Yanmar	Yanmar
Engine model	4TNV98CT	4TNV98CT
Gross Power	72 HP	53.70 kW
Net Power	70.67 HP	52.70 kW
Max. torque / Engine rotation	217 ft-lbs / 1625 rpm	294.20 Nm / 1625 rpm
Battery	12 V	12 V
Starter	4 HP	3 kW
Hydraulics		
Standard flow - Auxiliary hydraulics	23.51 G/min	89 l/min
High-Flow Auxiliary Hydraulics - Option	34.87 G/min	132 l/min
Tank capacities		
Fuel tank	24 US gal	92.70 l
Reservoir Capacity Hydraulics	11 US gal	40 l
Displacement	0.87 US gal	3.30 l
Noise and vibration		
Environmental noise (LwA)	101 dB	101 dB
Whole-Body Vibration (ISO 2631-1)	1.07 m/s <sup>2</sup>	1.07 m/s <sup>2</sup>
Vibration to whole hand/arm	< 1.50 m/s <sup>2</sup>	< 1.50 m/s <sup>2</sup>



## VERTICAL LIFT



# V330

Capacities	Imperial	Metric
Rated Operating Capacity	3300 lbs	1497 kg
Unladen weight	9090 lbs	4123 kg
Weight and dimensions		
Overall Operating Height - Fully Raised	172 in	4369 mm
Height to Hinge Pin - Fully Raised	131 in	3332 mm
Overall Height to Top of ROPS	82 in	2083 mm
Dump angle at full height	42 °	42 °
Dump height	99 in	2502 mm
Overall length with bucket	153 in	3874 mm
Dump reach - Full height	32 in	813 mm
Rollback at ground	29 °	29 °
Seat to ground height	41 in	1041 mm
Wheelbase	49 in	1257 mm
Overall width less bucket	72 in	1819 mm
Bucket Width	74 in	1880 mm
Ground clearance	9 in	229 mm
Overall length - Less Bucket	119 in	3023 mm
Clearance Radius - Front with Bucket	94 in	2400 mm
Clearance Circle - Front without Bucket	56 in	1422 mm
Clearance Circle - Rear	69 in	1765 mm
Performances		
Travel Speed with Two-Speed Option - Maximum	12 mph	20.10 km/h
Travel speed (unladen)	8 mph	13.50 km/h
Wheels		
Standard tires	14.00x17.5 HD	14.00x17.5 HD
Engine		
Engine brand	Yanmar	Yanmar
Engine model	4TNV98CT	4TNV98CT
Gross Power	72 HP	53.70 kW
Net Power	70.67 HP	52.70 kW
Max. torque / Engine rotation	217 ft-lbs / 1625 rpm	294.20 Nm / 1625 rpm
Battery	12 V	12 V
Starter	4 HP	3 kW
Hydraulics		
Standard flow - Auxiliary hydraulics	23.5 G/min	89 l/min
High-Flow Auxiliary Hydraulics - Option	34.87 G/min	132 l/min
Tank capacities		
Fuel tank	24 US gal	92.70 l
Reservoir Capacity Hydraulics	11 US gal	40 l
Displacement	0.87 US gal	3.30 l
Noise and vibration		
Environmental noise (LwA)	101 dB	101 dB
Whole-Body Vibration (ISO 2631-1)	1.07 m/s <sup>2</sup>	1.07 m/s <sup>2</sup>
Vibration to whole hand/arm	< 1.50 m/s <sup>2</sup>	< 1.50 m/s <sup>2</sup>



## CONTROL TYPES

OPTIONAL



DUAL-HAND



JOYSTICK

The GEHL V330 offers visibility, intuitive controls, precise movement and an ergonomic operator station. This machine has impressive reach at full height, making it the ideal option in applications where loading trucks plays a role. Take advantage of all its performance to facilitate your daily operations. A true beast of a machine.

**3,300 lbs.**  
RATED LIFTING CAPACITY

**10'11"**  
HEIGHT TO HINGE PIN  
[FULLY RAISED]

**6'2"**  
BUCKET WIDTH  
[STANDARD]



# MAXIMIZE YOUR MACHINE



Scan with your phone to learn more and see a video overview.

## EQUIPMENT TRACKING

Geolocation, geofencing, hours of use, etc. You are in charge of defining when and where your machine can be operated. If it is stolen or used without authorization, you are notified immediately. Location, alerts, fuel consumption at your fingertips. Knowing your machine better, you can optimize how it is used and driven, improving financial and logistics management. Save time and enjoy a greater peace of mind.

## PREDICTIVE ANALYTICS

By accessing machine data, our technicians can anticipate routine maintenance operations and repairs with the needed parts, meaning issues are resolved quicker. By anticipating the maintenance operations that need to be performed, ensuring your machine is serviced at the most suitable time. The risk of unexpected breakdowns and downtime are substantially reduced.

## A TRUE PARTNER

With the network of GEHL partners by your side, you can work in complete confidence and count on high-level support and practical help at any moment. Monitoring of machine events enables you to implement corrective actions and optimize your up-time while also helping you understand your total cost of ownership. If the machine is sold, you can also pass on its "ID card" to the new owner as a gesture of transparency.

## STAY CONNECTED NO MATTER WHERE YOU ARE

### Connected Machine

Connected Machines provide instant remote access to recent activity, operation codes, CAN data and service alerts. With data management software, end-users and owners can be more proactive with machine maintenance and benefit from additional security features such as GEO fencing and access keypads.



# FULL SUPPORT

Manitou Group is here to help support and service the machines you love after purchase. Covering Financing, Warranties, Maintenance and more, we are dedicated to support the end customer. Whether you're in agriculture or construction, Manitou Group provides machines, attachments and services adapted to your daily needs. Our goal is to make your life easier! See what you can accomplish with your new GEHL and keep your peace of mind with Manitou Group services and solutions.

**MANITOU GROUP** | ATTACHMENTS

**MANITOU GROUP** | PARTS

**MANITOU GROUP** | FINANCE

# ALL NEW GEHL.COM



CHECK OUT THE NEW [GEHL.COM](https://www.gehl.com)

- SHOP MACHINES
- COMPARE MODELS
- FIND A DEALER
- LOCATE SUPPORT
- MACHINE PHOTOS & VIDEOS

Also linked to our social media pages allowing you to join the conversation with other GEHL machine enthusiasts.



FROM YOUR COMPUTER  
OR YOUR PHONE!



# GEHL<sup>®</sup>

**WORKS LIKE YOU<sup>™</sup>**

[GEHL.COM](http://GEHL.COM)



**Manitou Equipment America, LLC**

P.O. Box 179



One GEHL Way



West Bend, WI, USA 53095



P: (262) 334-9461

F: (262) 338-7517

**MANITOU**  
**GROUP**

GEHL reminds users to read and understand the operator's manual before operating any equipment. Also, make sure all safety devices and shields are in place and functioning properly. GEHL reserves the right to add improvements or make changes in specifications at any time without notice or obligation.